


## Perimetral edge

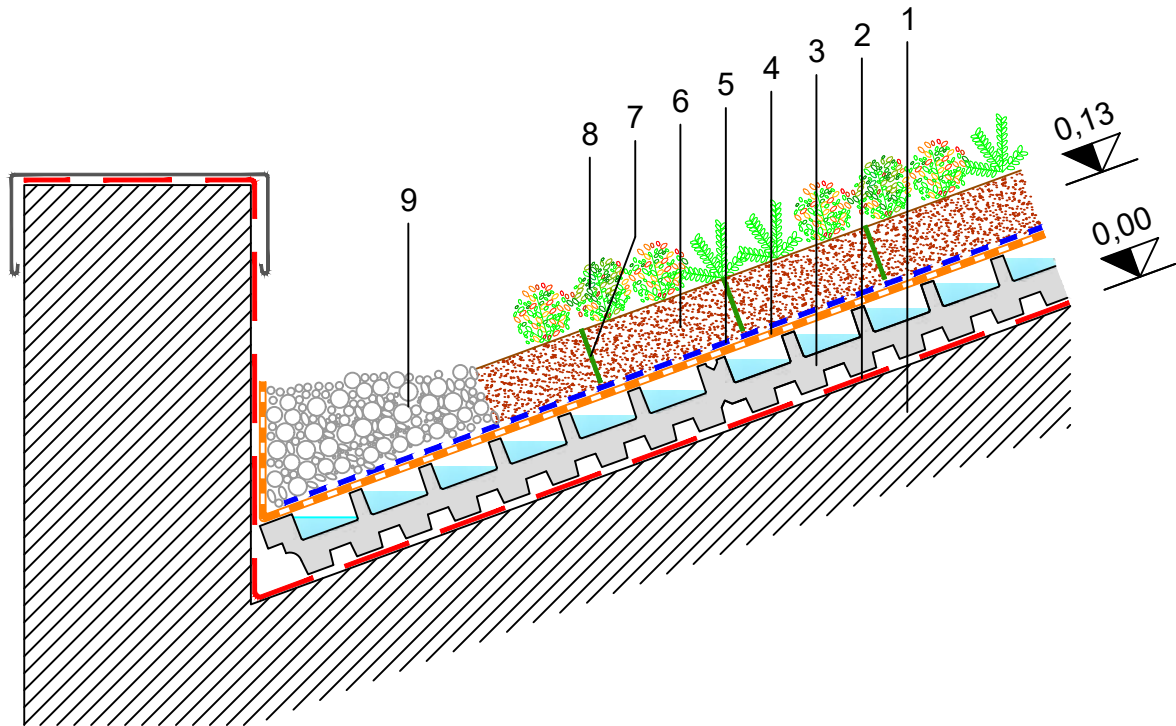

SCALE 1:10

### LABEL:

- 1 Sloped floor
- 2 Waterproof anti-root covering
- 3 DAKU FSD 20 [82 mm]
- 4 DAKU STABILFILTER SFE [1,30 mm]
- 5 DAKU GRID 4
- 6 DAKU ROOF SOIL 2 [80 mm]
- 7 DAKU GEO 75
- 8 DAKU SEDUM
- 9 Gravel

### TECHNICAL DATA:

Thickness:	16 cm
Weight (when saturated):	103 Kg/mq *
Water retained (total amount):	46,50 l/mq *

\* The data varies from the slope of the roof

 **Daku Italia s.r.l.**  
Via XIII Martiri, 28  
30027 San Donà di Piave (VE) - Italy  
P.I./C.F. 02972700278

[www.daku.it](http://www.daku.it)  
daku@daku.it  
Tel. +39 0421 51864  
Fax: +39 0421 334491

**EXTENSIVE PITCHED**